Polk I-25

LAND CORNER RECORD

Index: Z-9	Corner: Section Corner common to Section 32 & 33			*State of Indiana - Hoosier National Forest*
Section: 32,33	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe
Coordinate:	Lat./N:		Lon./E:	Datum:

CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
6-25-73	A.J. Sobiech	Aluminum cap	BK 155 PG 520, Monroe Co.	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	White Oak	3"	S 65° E	6.3"
	Sign Post	4"x4"	S 85° E	4.1"
	White Oak	6"	N 28° W	9.0"
	Red Oak	12"	S 30° W	18.0'
Evidence Found:				
2.) Monument Found:	Aluminum cap replaced 10"x6"x18" stone found, pointed on top.			
Date of Survey:	Surveyor:	Monument:	Recording Information:	
1-24-95	E. Fleener	Aluminum cap		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	On sw'rly aspect of ridge top at corner of apparent use line			
Evidence Found:	hardwood saw timber southerly, southwesterly & west of monument.			
Monument Found:	Aluminum cap left as found.			

Monument Photograph:

ACCESSORIES: Bearing and distances from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	White Oak	10"	N 30° W	8.83'
	White Oak	14"	S 66° E	29.0'
	Hickory	6"	S 01° E	4.03'
Monument Found or Set:	Found 3" dia. steel pipe with a 3" brass disk, 0.4' above grade.			

MONUMENT SKETCH



NARRATIVE REFERENCE:

The monument is 3" dia. steel pipe with a 3" brass disk, 0.4' above grade, located approximately 60' South of ridge top, steep slope to South.

SECTION DIAGRAM



Corner Location = ●

PERPETUATION RECORD:

Monument was found undisturbed per the 1995 Land Corner Record. One existing bearing tree was remarked. Two new bearing trees were established.

Section: 32 & 33	Prepared By: BRG #7308	Date: 12/27/2012

Approved by SRB 2-26-2013

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 33 **Township:** 7 North **Range:** 1 East **Corner ID:** Polk I-25

Monument Description & Remarks: 3" Brass Disk stamped, "T7N R1E, S.32/S.33, T6N R1E, S.5, 1973 SO.143". Survey Sign 4ft above ground at pt C

References On File: Andrew J. Sobiech certified land corner restoration, Monument Record (1973), on file in Surveyor Office

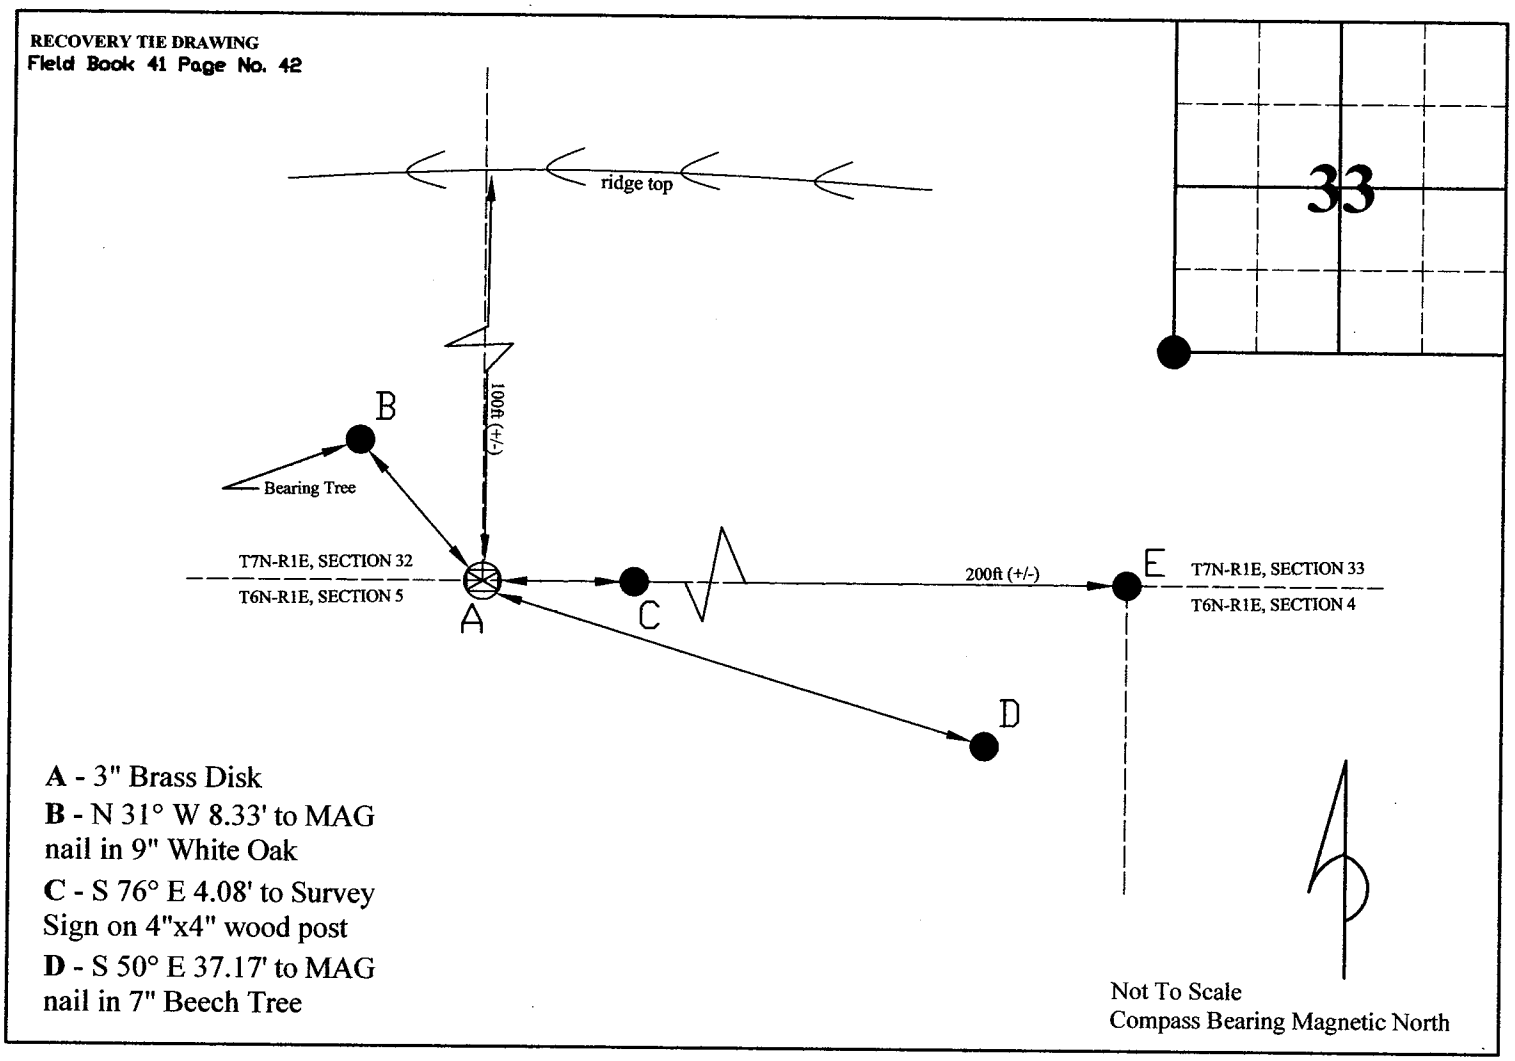

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code, and the above data is given under my hand and seal this 18th day of September, 2008.

SEAL — MONROE COUNTY SURVEYOR — INDIANA

SEAL — MONROE COUNTY SURVEYOR REVIEW BOARD

Administered by the Monroe County Surveyor Review Board

Date: 10/7/2008

Drawn by: T.E.R Print date: October 3, 2008

Index No 7-9 LAND CORNER RECORD FSM 7150 POLK_I25

T. 7N R. 1E 2nd P.Mer. County Lawrence/Monroe State of Indiana

Corner common to Sections 32 & 33 Hoosier National Forest

(8)

EXISTING SURVEYS

Original Government Survey

Year Surveyed 1814 By A. Henrie

Original Monument not known

	Species	Dia	Bearing	Dist
BT's				

Original Survey evidence Found

Date of Search _____ By _____

Monument Found _____

	Orig. Species	Dia	Bearing	Dist
BT's				
Found				

Subsequent Corner Restoration

Date Surveyed _____ By _____

Where Filed or recorded: _____

Book: ___ Page ___ _____

Monument Set _____

BT's	Species	Dia	Bearing	Dist
Ref.				
Obj.				

Evidence of Subsequent Corner Restoration Found

Date of Search _____ By _____

Monument Found _____

	Species	Dia	Bearing	Dist
BT's				
Found				

Subsequent Corner Restoration

Date Surveyed 1973 By Schieck

Where Filed or recorded: USFS

Book: * Page ___ _____

Monument Set Aluminum cap

BT's	Species	Dia	Bearing	Dist
Ref.	W. Oak	8"	N27W	8.9'
Obj.	R. Oak	14"	S37W	12.1

Evidence of Subsequent Corner Restoration Found

Date of Search _____ By _____

Monument Found _____

	Species	Dia	Bearing	Dist
BT's				
Found				

* Forest Service Field Notes Pg 53 No book identification

OTHER EVIDENCE

Describe corner location relative to nearby features and how to reach the corner location - note fences roads, timber, streams, topo changes, etc: on SW'ly aspect of ridge top at corner of apparent use line hewd saw tbr S'ly, SW'ly & W of monument

Sketch of Monument



PERPETUATION RECORD

Monument: Describe new monument set, or work done to preserve existing monument:

left as found

CORNER DIAGRAM

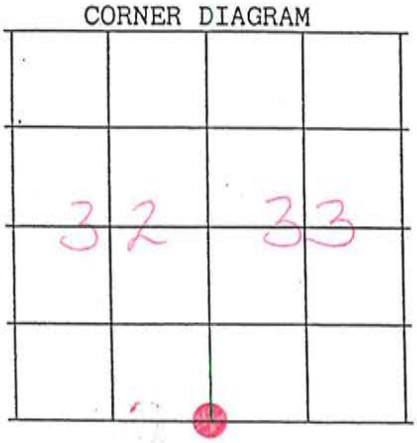

Accessories: Describe new Bt's and/or witness objects established or work done to preserve existing evidence

Photo Identified

Photo # _____

Strip/Series _____

Pinpricked _____

Search Hours _____

Corner Recordation Certificate prepared: Yes ___ No ___

Filed or recorded in County Records: Date: _____

Book: _____ Page: _____

Corner Record by: Ed Flecher Date: 1-24-95

I-25

R9-5680-14 (5/1/64) H. C. MILLER CO., MILWAUKEE 447802

CERTIFIED LAND CORNER RESTORATION

State of Indiana
County of Monroe } ss.

I Andrew J. Sobiech, do hereby certify that on the 25th day of June, 19 73, I found evidence of the Section corner of Section 32 and 33 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original monument was a wood post set in 1814.
Original bearing trees:

Black Oak	Black Oak
12" Di.	8" Di.
S 27° W.	N 86° E
1 lks	20 lks

Filed in Book 2, page 28.
Subsequent survey by Buskirk, Co surveyor, filed in Monroe County.
His bearing trees were:

Red Oak	Red Oak
5" Di.	8" Di.
N 89° E	S 18° W
25 lks	9½ lks

See also:
Book 1, page 272

Description of corner evidence found:

Found stone 10"x6"x18" long, pointed at the top. Stone was at intersection of a fence from north and east. Homer Deckard testified that he has known of the stone for over sixty years. This stone is at the southeast corner of Mr. Deckard's property.

Description of monument and accessories I established to perpetuate the original location of this corner:

I replaced the stone with a 2" I.D. by 3 ft. long concrete filled galvanized iron pipe, capped with a 3"" Di. brass tablet stamped to identify the corner. I established the following witnesses:

W. Oak	Sign Post	W. Oak	R. Oak
3" Di.	4"x4"	6" Di.	12" Di.
S 65° E	S 85° E	N 28° W	S 30° W
6.3"	4.1"	9.0"	18.0

I laid the old stone on top of ground beside new monument.



Field Assistant ~~Resident witnesses~~ Henry Deaton- Ron Overshiner, U.S.F.S.

Dated at Brownstown Indiana, this 25th day of June 19 73

Index No. Z-9 (Alphabetical – Numerical)

LAND CORNER RECORD
(RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67) GPO 806-924

T. 7N R. 1E 2nd Mer. N.F. Hoosier County Monroe State Ind.

Section ____ Corner common to sections 32, 33, ____ and ____

EXISTING SURVEYS

Original Government Survey

Year surveyed ____

Original monument ____ (Wood post, stone, pile of stones, pipe, etc.)

Bearing Trees

Species	B oak	B oak		
Diameter	12	8		
Bearing	S E	N 60 E		
Distance	6 lks	20 lks		

Original Evidence Found

Year of search 1973 By H. Deckard

Monument found Found Stone 12" aboveground

Original Bearing Trees Found

Species				
Diameter				
Bearing				
Distance				

Subsequent Corner Restoration

Year surveyed 1860 By Buskirk Co. Surveyor

Where filed or recorded Monroe Co Sur. Bk pg #28-29

Monument ____ (Original, concrete post, iron rod, etc.)

Bearing Trees, Reference Objects

Species	W.O			
Diameter	8"			
Bearing	N 89 E			
Distance	25 lks			

Evidence of Subsequent Corner Restoration Found

Year of search ____ By ____

Bearing Trees, Reference Objects

Sketch

○ Corner ▨ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections	33 – 4			
Object	Brook 3 lks S			
Record distance	E 18 ch			
Measured distance				

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any. Wire fence running N and E at edge of clearing (From F.S. Mo. Rec. on old card) Deckard found fences and stone mentioned in the old F.S. notes Stone is 10"x5", the top comes to a point, no marks.

At time of search:

1. Did you have the record description? Yes ✓ No ____

2. How was search area located? Pacing, chaining, photos, maps, etc. F.S. notes

3. Man hours spent in search 2 hr.

4. Do you think additional search might recover evidence? Yes ____ No ____

5. Signature H Deckard

Perpetuation Record

Monument and accessories established. Include brief description of area. Homer Deckard testified that he has known of the stone for over 60 years. He doesn't know who set the stone, it was there when he was a young boy. He owns the property next to the stone. The USA owns all other adjacent lands.

(Found stump hole)

1854 - J. Spencer made now witness Red oak 3" N 12 W 6 lks

Certified corner restoration certificate prepared: Yes ____ No ____

Filed in county records at ____ Date ____ County Document No. ____

Identifed on aerial photo No. ____ Which is filed at ____